


OUTDOOR IP BULLET WITH IR & VARIFOCAL

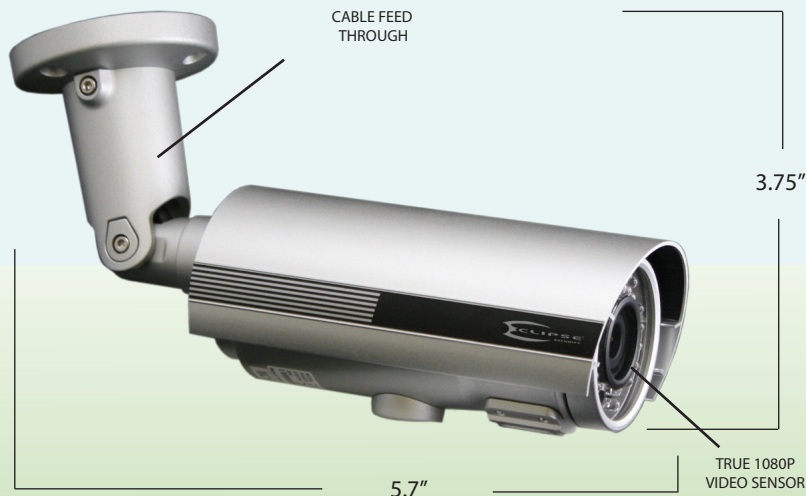

FEATURES

- Day / Night Mode, Built-in ICR
- Power over Ethernet
- Vandal-proof, IP67
- 35 pcs IR LED 25 Meters
- 3D+2D DNR
- Free Bundle 36 CH Recording Software

MODEL : ECL-IP24MP

SPECIFICATIONS

NETWORK	
SECURITY	Password Protection, IP Address Filtering, User HTTPS encrypted data transmission, 802.1x port-based authentication for network protection, QoS/DSCP
PROTOCOLS	TCP/IP, UDP, DHCP, PPPoE, HTTP, DDNS, DynDNS, NTP, FTP, SMTP, HTTPS, SNMP, UDP, RTSP, IEEE802.1X, 3GPP, UPnP, IPv4/v6, SAMBA, Bonjour
APPLICATION INTEGRATION INTERFACE	CGI / ONVIF Support
VIEWING REQUIREMENTS	WIN XP, VISTA, or 7, MS Internet Explorer 6+
ETHERNET	10/100 Base-T
HARDWARE	
CPU	ARM 9, 32-Bit RISC
RAM	256m
FLASH	16m
RELAY OUTPUTS	N.O. & N.C
AUDIO FORMAT	G.711 audio
MICROPHONE INPUT	Yes
2-WAY COMMUNICATION	Supported (requires speaker, & mic. not included)
POWER OVER ETHERNET	Yes (POE)
PHYSICAL	
OPERATING TEMP	-10 °C ~ 50 °C (14 °F ~ 122 °F)
CASE	Hardened aluminum alloy
ANTI-VANDAL	IP67 rated tough metal construction, dome built to withstand heavy blows, protected cable routing.
BRACKET	Cable feed through
DIMENSIONS	5.7" long, 3.75" wide

VIDEO SENSOR	1/2.7" 2 MP CMOS
RESOLUTION	720p, 1080p, 1920x1080, 1600x1200, 1280x1024, 1280x960, 1280x720, 800x600, 640x480, 320x240, 176x144
LENS	3.3~16mm Varifocal
EFFECTIVE PIXELS (HXV)	1920 x1080
ANGLE OF VIEW	23.6° ~ 97.9°
ILLUMINATION	0.1 lux @ F1.2, 0 Lux (IR on), 0.0 LUX
INFRARED SYSTEM	Automatic, 35 IR LEDs (850nm), up to 25 meters range
COMPRESSION	H.264 / M-JPEG / MPEG4
SHUTTER SPEED	1/5 s to 1/10000 Selectable
STREAMING	Dual streaming supported
VIDEO OUT	Yes
USER ADJUSTMENTS	Brightness, Contrast, Sharpness, BLC, Night Mode
SNAPSHOT & ZOOM	Yes
FULL SCREEN MONITORING	Yes
PRIVACY MASK	Yes, 3 zones
BITRATE ADJUST	CBR, VBR
DNR	On/Off
CERTIFICATIONS	
CE	Yes
FCC	Yes
RoHS	Yes
INCLUDED ACCESSORIES	
Power Adapter, Power Cable, CD-ROM (User Manual, Includes Bundled Viewing Software)	



ADVANCED TECHNOLOGY AT YOUR COMMAND

WWW.ECLIPSECCTV.COM